


Dialight

CANADIAN HAND and WALKING PERSON COUNTDOWN PEDESTRIAN SIGNALS

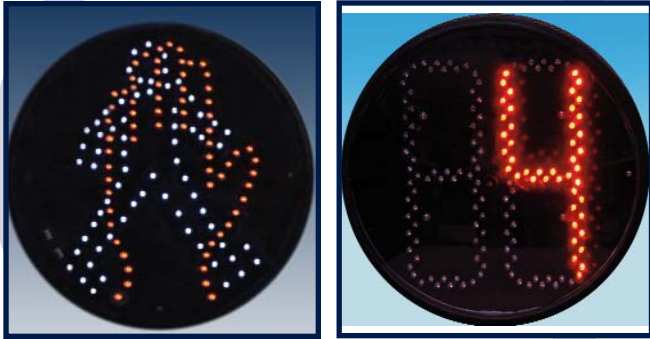

FEATURES / BENEFITS

- ▲ 90% reduction in power vs. incandescent
- ▲ Long life; up to 10 times longer than incandescent
- ▲ Sealed moisture resistant enclosure
- ▲ Lens available to fit most pedestrian heads
- ▲ Lens has a textured surface to reduce glare
- ▲ Wide selection of products
- ▲ Easy to install into existing signal enclosure

SPECIFICATIONS

- ▲ Operating Voltage Range: 80VAC to 135VAC (120VAC nominal)
- ▲ Fuse and transient suppressor incorporated for line and load protection
- ▲ Operating Temperature Range: -40°C to +74°C
- ▲ Turn-On/Turn-Off Time = 75 msec max
- ▲ Power factor >0.9
- ▲ Total harmonic distortion <20%
- ▲ Meets FCC Title 47, Subpart B, Section 15 Regulations for electrical noise
- ▲ Provided with quick connect terminals and Spade adapters
- ▲ Written manufacturer's warranty available on request
- ▲ All products traceable by serial number
- ▲ LED Colors:
Hand - Portland Orange
Walking Person - Lunar White

TYPICAL OPERATING CHARACTERISTICS

Part Number	Housing Size	SYMBOL			WATTAGE			CSA Approved*
		Hand	Person	Digits	Hand	Person	Countdown	
Single								
430-5772-001	12"x12"	Outline			6		5	
430-7772-001	12"x12"		Outline			6	5	
Overlay								
430-6775-001	12" Round	Outline	Outline		6	6	5	•
430-6776-001	12"x12"	Outline	Outline		6	6	5	•
Side-By-Side								
430-6777-001	16"x18"	Outline	Outline		6	6	5	•
Countdown								
430-5270-001	12" Round			Filled			5	•

*CSA approval is to Std. 250 for Luminaires



Dialight Corporation 1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com

Dialight Corporation

MDTSCANHWP001_B